


Technical data sheet

CV Living **Donau**

Cushioned vinyl flooring

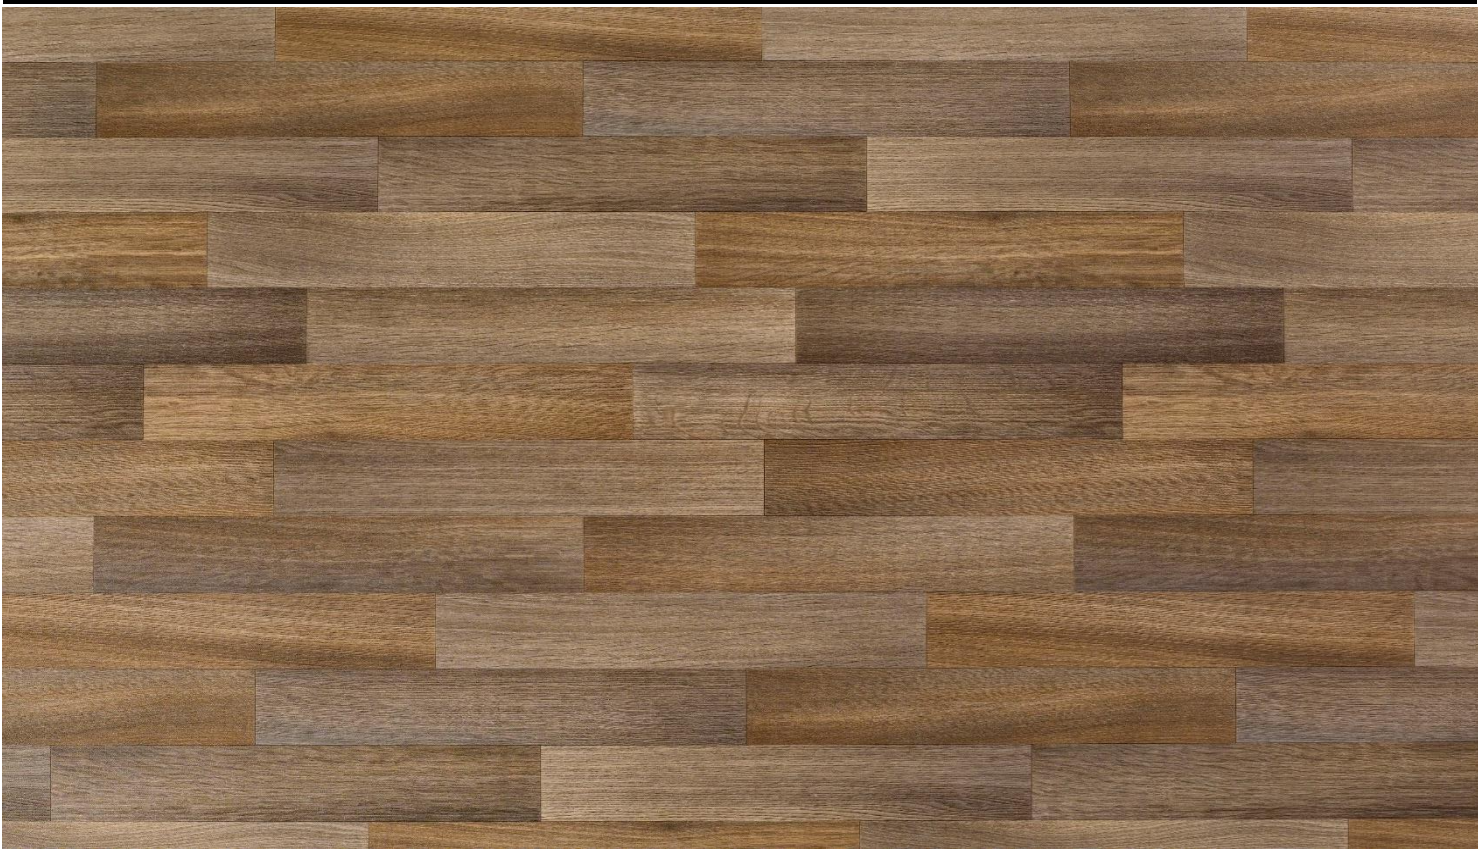

Article number(s):	150   170   200   210

Pictograms / Quality seal / Certificates



\*On water-bearing systems generally up to a surface temperature of 27 °C

DoP number: CVANDANTE2/3/4

# Technical data sheet

## CV Living Donau

### Material / structure

Residential class	23	
Commercial class	-	
Industrial class	-	
Total thickness (mm) approx.	2,50	
Wear layer (mm) approx.	0,25	
Surface coating	PU	
Weight per unit area (g/m²) approx.	1.550	
Available widths (cm)	200 + 300 + 400	
Backing design	Foam backing	
Repeat L x W (cm)	100 x 120	Colour: 150, 170, 200, 210

### Product characteristics

Reduction of impact sound (dB) approx.	16
Dimensional stability (%)	≤ 0.40
Static indentation behaviour (mm)	< 0.35
Underfloor heating	suitable*
Lightfastness	≥ 6
REACH	The current requirements are met
Chemical resistance	Resistant
Suitable for chair castors	no
Fire class	C <sub>fl</sub> -s1
Skidding behaviour	R10/DS
Thermal resistance approx.	0.01 m <sup>2</sup> *K/W
Guarantee	7 years (residential)

\*On water-bearing systems generally up to a surface temperature of 27 °C

### Tolerances

Deviation in roll length	Not under the nominal value
Deviation in roll width	Not under the nominal value
Deviation in thickness	Nominal value ± 0.20 mm
Deviation in thickness of the wear layer	Nominal value ± 0.05 mm
Deviation in overall mass	Nominal value + 13 % / - 10 %

Dimensions and tolerance values in accordance with DIN EN ISO 26986. Dimensional characteristics and permitted dimensional deviations, which have been determined in the factory, have been given in accordance with the standard.